


FEATURES

- Attenuation Range: 0 to 88.5dB Plus Full Muting
- Resolution: 1.5dB
- Low Distortion: THD Better Than -98dB
IMD Better Than -92dB
- Includes Switches for Loudness Compensation
- Low Power Consumption
- Excellent S/N Ratio: 100dB (20Hz – 20kHz)
- Low Cost
- Complies with DIN 45403 and DIN 45405
- Latch-Proof Operation

APPLICATIONS

- Digitally Controlled Audio Gain
- Wide Dynamic Range D/A Converters

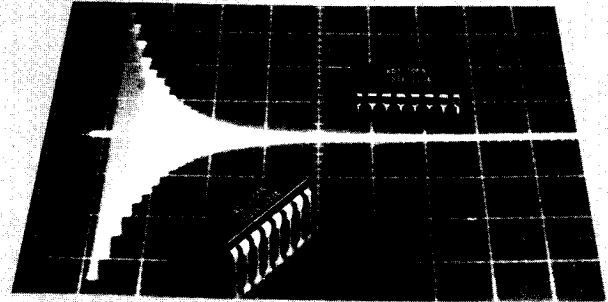

GENERAL DESCRIPTION

The AD7110 LOGDAC™ is a monolithic CMOS digitally controlled audio attenuator (U.S. Patent No. 4521764). With the addition of an external operational amplifier it provides 0 to 88.5dB of attenuation in 1.5dB steps, plus full muting of the audio input signal for digital input code 1111XX, where X can be 1 or 0. The audio input is applied to the V_{IN} pin and the device delivers a logarithmically related output current which is determined by a 6-bit binary input code. Loudness compensation switches are provided on the device to enable additional bass boost at low volume settings.

The device is manufactured using an advanced thin-film on CMOS monolithic wafer fabrication process and is packaged in a 16-pin DIP.

ORDERING INFORMATION


Model	Package	Operating Temperature Range
AD7110KN	16-Pin Plastic DIP	0 to +50°C

*U.S. Patent No. 4521764.


LOGDAC is a trademark of Analog Devices, Inc.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

FUNCTIONAL DIAGRAM

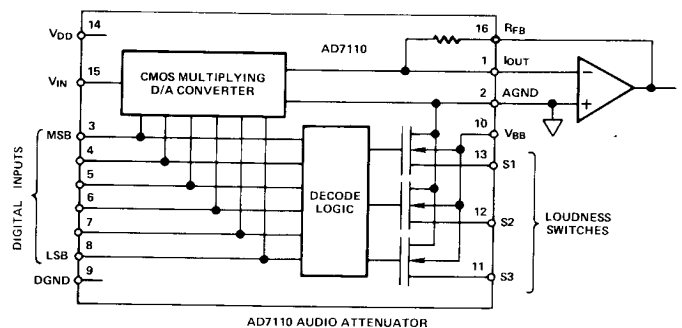

PIN CONFIGURATION

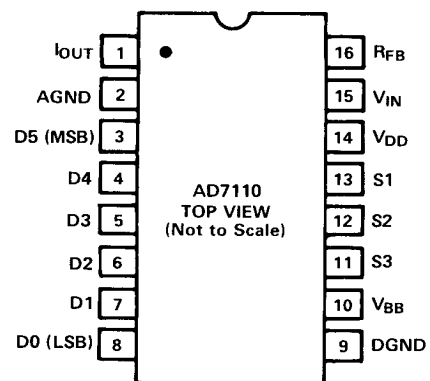

One Technology Way; P. O. Box 9106; Norwood, MA 02062-9106 U.S.A.
 Tel: 617/329-4700
 Twx: 710/394-6577
 Telex: 924491
 Cables: ANALOG NORWOODMASS

AUDIO SPECIFICATIONS

($V_{DD} = +12V$, $V_{BB} = 0$ to $-12V$, Pin 11-13 Open, $T_A = 0$ to $+50^\circ\text{C}$ unless otherwise noted)

PARAMETER	AD7110 WITH "IDEAL OP AMP"	AD7110 WITH TL071 OP-AMP (FIG. 1)	UNITS	TEST CONDITIONS/COMMENTS
ATTENUATION RANGE	0 to -88.5	0 to -88.5	dB	$V_{IN} = 10V$ rms @ 1kHz
RESOLUTION	1.5 max	1.5 max	dB	Frequency Range: 20Hz to 20kHz
ATTENUATION ACCURACY (Absolute) 0dB to -48dB -48dB to -88.5dB	± 0.7 max Monotonic	± 0.7 max Monotonic	dB	The AD7110 is guaranteed monotonic for all attenuation settings between 0 and -88.5dB
TOTAL HARMONIC DISTORTION (THD)	-98 max	-85 typ	dB	per DIN 45403, BLATT 2 (with input level of 1V rms)
INTERMODULATION DISTORTION (IMD)	-92 max	-79 typ	dB	per DIN 45403, BLATT 4
V_{IN}	30 max	10 max	V peak	for <1% (max) THD (Note 1)
FEEDTHROUGH ERROR	Better than -85dB @ 1kHz. Feedthrough is primarily dependent upon printed circuit board layout.			
OUTPUT NOISE VOLTAGE DENSITY	30 max	70 typ	nV/ $\sqrt{\text{Hz}}$	20Hz to 20kHz (Note 2)
BANDWIDTH	D.C. to 150 min	D.C. to 250 typ	kHz	0dB Attenuation

ELECTRICAL SPECIFICATIONS

($V_{DD} = +12V$, $V_{BB} = 0$ to $-12V$, Pin 11-13 Open, $T_A = 0$ to $+50^\circ\text{C}$ unless otherwise noted)

PARAMETER	LIMIT	TEST CONDITIONS/COMMENTS
ANALOG INPUT		
Input Resistance of V_{IN} (pin 15)	18k Ω max 9k Ω min	Input resistance for a given unit is constant for all input conditions. $V_{OUT} = 0V$
LOUDNESS SWITCHES		
Switch ON Resistance R_{ON}	600 Ω max	Switch Current = 1mA $V_{switch} = +12V$
Switch OFF Leakage Current	1 μA max	
Switch Coding	See Table 1	
DIGITAL INPUTS		
V_{INH}	11.5V min	
V_{INL}	0.5V max	
I_{INH}	1 μA max	
I_{INL}	1 μA max	
C_{IN}	5pF typ	
POWER REQUIREMENTS		
V_{DD}	+12V	
V_{DD} Range	+5V to +12V	Functionality with degraded performance.
V_{BB}	-12V	
I_{DD}	1mA max	Digital Inputs = V_{INL} or V_{INH}
I_{BB}	100 μA max	
Total Power Dissipation	5mW typ	

NOTES


- Output amplifier (and amplifier supplies) must be capable of 30V peak output.
- Output noise voltage density includes op amp noise.

Specifications subject to change without notice.

OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).


16-Pin Plastic DIP

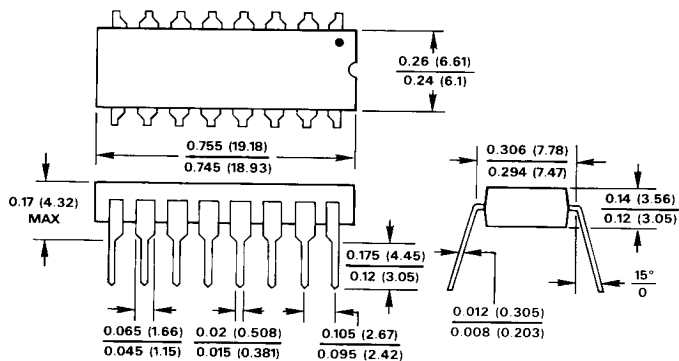

- NOTES
- LEAD NO. 1 IDENTIFIED BY DOT OR NOTCH
 - LEADS ARE SOLDER-PLATED KOVAR

BONDING DIAGRAM

Dimensions shown in inches and (mm).

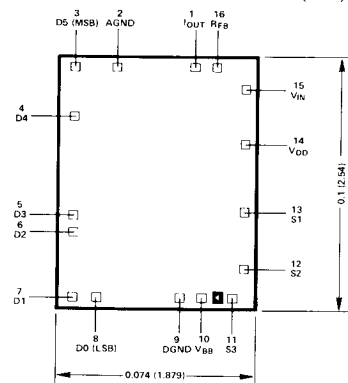


- NOTES
- PAD NUMBERS CORRESPOND TO PIN NUMBERS SHOWN IN PIN CONFIGURATION, PAGE 1
 - PAD 9 (DGND) SHOULD BE BONDED FIRST TO MINIMIZE ESD HAZARDS
 - PADS ARE 0.004 x 0.004 @ 0.102 x 0.102.

ABSOLUTE MAXIMUM RATINGS

($T_A = +25^\circ\text{C}$ unless otherwise noted)

* V_{DD} (to GND)	+14V
* V_{BB} (to GND).	-14V
Voltage (pins 11, 12, 13) to GND.	V_{BB} , +14V
V_{IN} (to GND).	$\pm 35V$
Digital Input Voltage to GND	-0.3V to V_{DD}
Output Voltage (Pin 1) to GND	-100mV to V_{DD}
Power Dissipation (Package)	670mW
Operating Temperature.	0 to $+70^\circ\text{C}$
Storage Temperature	-65°C to $+150^\circ\text{C}$
Lead Temperature (Soldering, 10 seconds).	$+300^\circ\text{C}$

*If Loudness Compensation Switches (S1, S2, S3) are not used, the negative power supply may be omitted and V_{BB} (Pin 10) connected instead to DGND (Pin 9). In this case the absolute maximum rating of V_{DD} is +17V.



CAUTION:
ESD (Electro-Static-Discharge) sensitive device. The digital control inputs are diode protected; however, permanent damage may occur on unconnected devices subject to high energy electrostatic fields. Unused devices must be stored in conductive foam or shunts. The foam should be discharged to the destination socket before devices are removed.

TERMINOLOGY

RESOLUTION: Nominal change in attenuation when moving between two adjacent binary codes. The AD7110 resolution is 1.5dB.

MONOTONICITY: The AD7110 digitally controlled audio attenuator is monotonic if the analog output decreases (or remains constant) as the digital input code (attenuation setting) increases.

FEEDTHROUGH ERROR: That portion of the input signal which reaches the output when the digital input code is set to mute the input signal.

ANALOG CIRCUIT PERFORMANCE:

Table I gives the nominal attenuation in dB for the AD7110 for all digital input codes. It also shows the Loudness Switch states and the nominal output voltage when using an external operational amplifier (as shown in Figure 1) and a fixed -10 volt reference applied to V_{IN} (pin 15). It may be seen that the transfer function for the circuit of Figure 1 is given by

$$V_{OUT} = -V_{IN} 10 \exp \left\{ -\frac{1.5N}{20} \right\}$$

where N is the binary input for values 0 to 59. For N = 60 through 63 the input is fully muted, that is, the attenuation is infinite.

HIGH FREQUENCY AMPLIFIERS

R_{FB} and the output capacitance of the AD7110 create a phase lag in the output amplifier's feedback circuit. This phase lag, in conjunction with the amplifier's phase lag, may cause ringing or oscillation. When using a high speed amplifier, shunting the amplifier input to output with 30–50pF of feedback capacitance (C1) ensures stability.

DC PERFORMANCE OF AD7110

For fixed-reference applications, an output amplifier with low offset voltage (less than $50\mu\text{V}$) is required, e.g. the AD517L. This combination will provide the utmost stability at the expense of slow settling times.

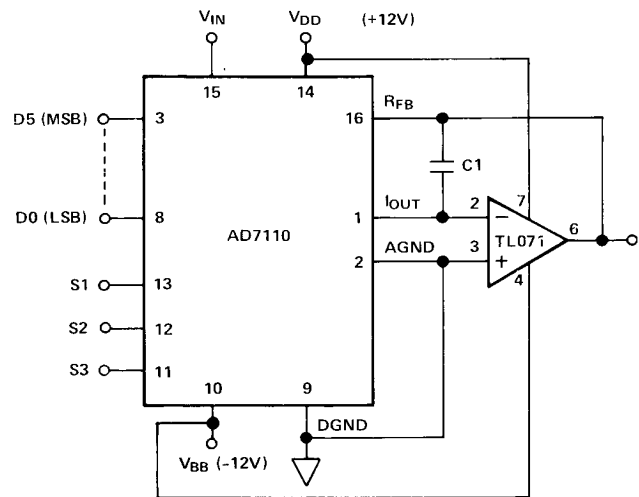


Figure 1.

Table 1

N	Digital Input		Attenuation dB	Switches ¹			V _{OUT} ²
	D5	D0		S1	S2	S3	
0	00	00 00	0.0				10.00
1	00	00 01	1.5				8.414
2	00	00 10	3.0				7.079
3	00	00 11	4.5				5.957
4	00	01 00	6.0				5.012
5	00	01 01	7.5				4.217
6	00	01 10	9.0				3.548
7	00	01 11	10.5				2.985
8	00	10 00	12.0				2.512
9	00	10 01	13.5				2.113
10	00	10 10	15.0				1.778
11	00	10 11	16.5				1.496
12	00	11 00	18.0				1.259
13	00	11 01	19.5				1.059
14	00	11 10	21.0				0.891
15	00	11 11	22.5				0.750
16	01	00 00	24.0				0.631
17	01	00 01	25.5				0.531
18	01	00 10	27.0				0.447
19	01	00 11	28.5				0.376
20	01	01 00	30.0				0.316
21	01	01 01	31.5				0.266
22	01	01 10	33.0				0.224
23	01	01 11	34.5				0.188
24	01	10 00	36.0				0.158
25	01	10 01	37.5				0.133
26	01	10 10	39.0				0.112
27	01	10 11	40.5				0.0944
28	01	11 00	42.0				0.0794
29	01	11 01	43.5				0.0668
30	01	11 10	45.0				0.0562
31	01	11 11	46.5				0.0473
32	10	00 00	48.0				0.0398
33	10	00 01	49.5				0.0335
34	10	00 10	51.0				0.0282
35	10	00 11	52.5				0.0237
36	10	01 00	54.0				0.0200
37	10	01 01	55.5				0.0168
38	10	01 10	57.0				0.0141
39	10	01 11	58.5				0.0119
40	10	10 00	60.0				0.0100
41	10	10 01	61.5				0.00841
42	10	10 10	63.0				0.00708
43	10	10 11	64.5				0.00596
44	10	11 00	66.0				0.00501
45	10	11 01	67.5				0.00422
46	10	11 10	69.0				0.00355
47	10	11 11	70.5				0.00299
48	11	00 00	72.0				0.00251
49	11	00 01	73.5				0.00211
50	11	00 10	75.0				0.00178
51	11	00 11	76.5				0.00150
52	11	01 00	78.0				0.00126
53	11	01 01	79.5				0.00106
54	11	01 10	81.0				0.000891
55	11	01 11	82.5				0.000750
56	11	10 00	84.0				0.000631
57	11	10 01	85.5				0.000531
58	11	10 10	87.0				0.000447
59	11	10 11	88.5				0.000376
60	11	11 XX ³	∞				

NOTES:

¹ Switch closed in shaded area.

² V_{IN} = -10V dc

³ X = 1 or 0. Output is fully muted for N ≥ 60.

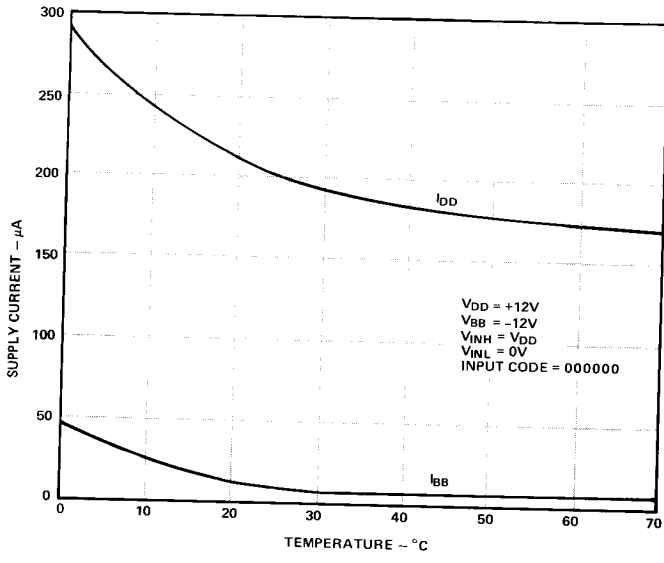


Figure 2. Power Supply Current vs. Temperature

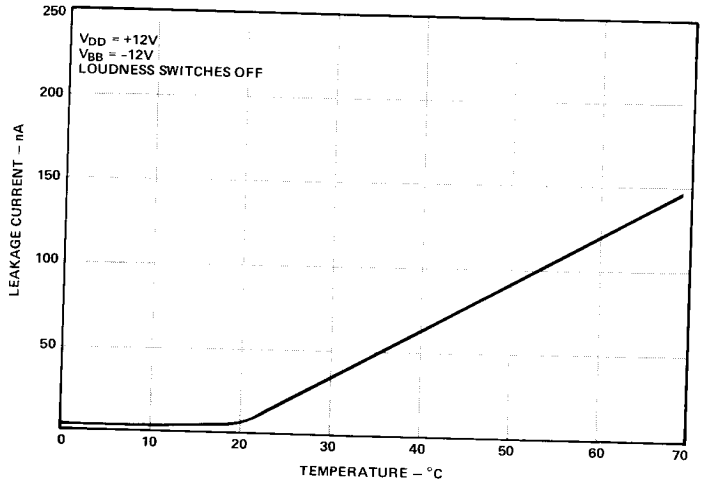


Figure 5. Loudness Switch Leakage Current vs. Temperature

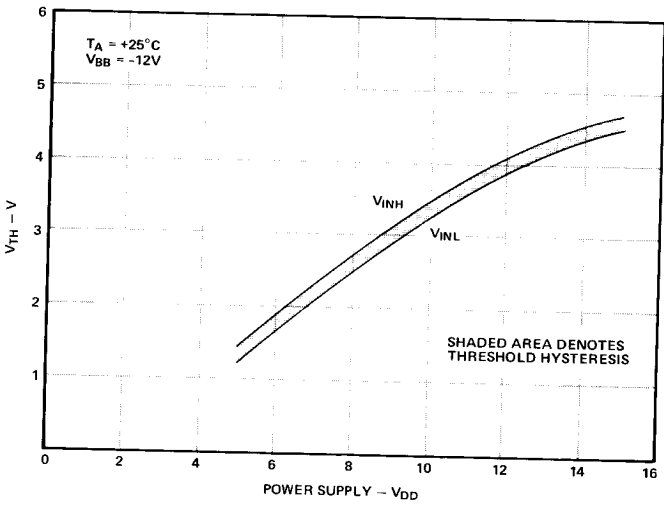


Figure 3. Digital Threshold Voltage vs. Power Supply Voltage

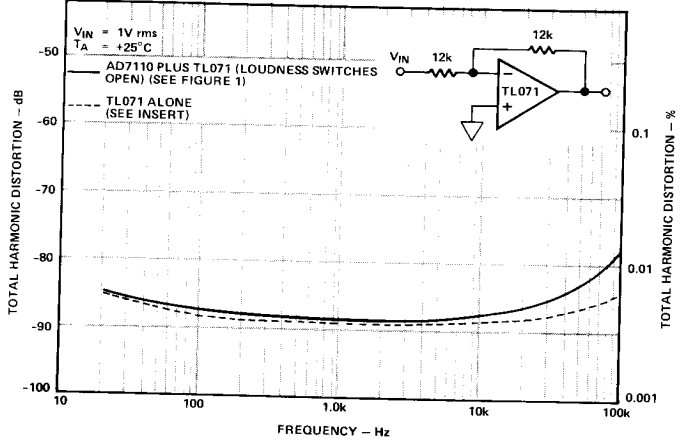


Figure 6. Total Harmonic Distortion vs. Frequency

Figure 6 shows that the total harmonic distortion of the attenuator circuit of Figure 1 is almost totally dependent on the characteristics of the operational amplifier used.

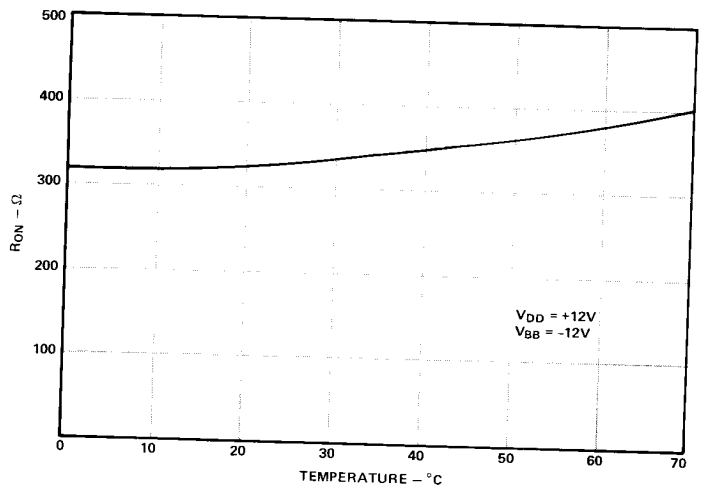


Figure 4. Loudness Switch On Resistance vs. Temperature

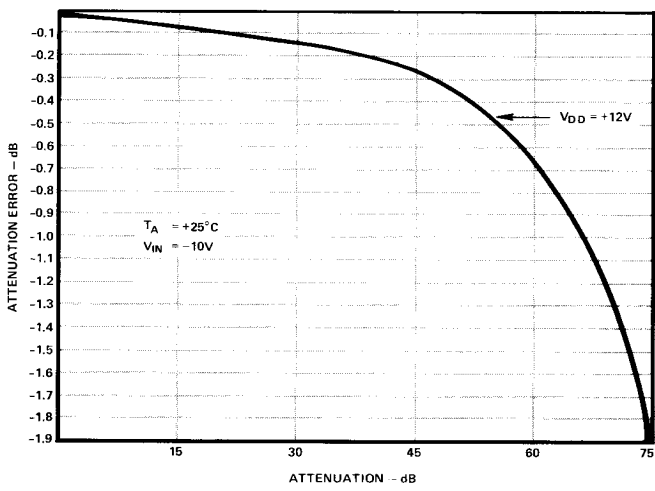


Figure 7. Typical dc Attenuation Error vs. Attenuation

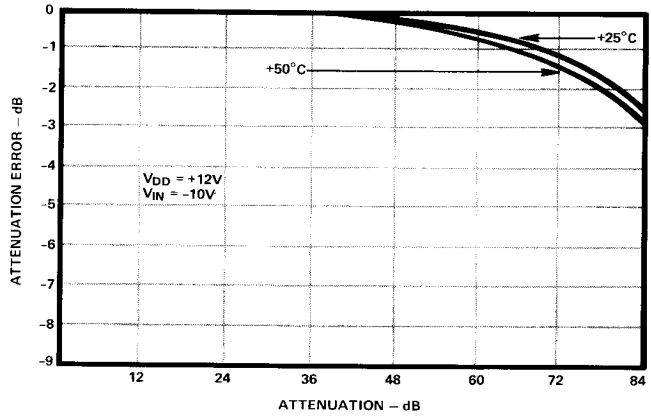


Figure 8. Typical dc Attenuation Error vs. Attenuation & Temperature

Applications Information

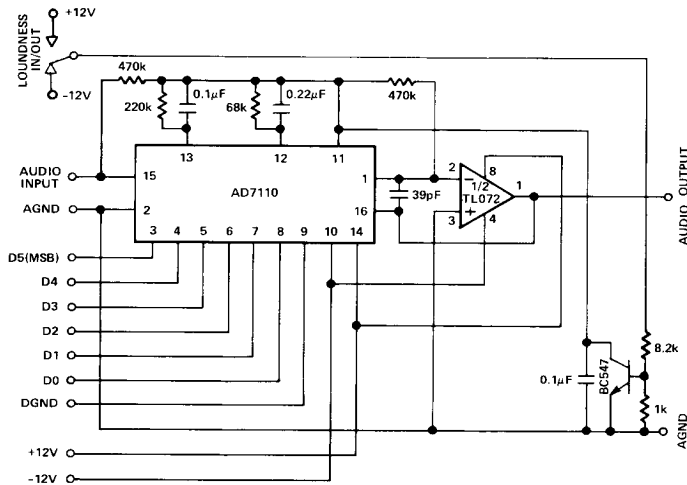


Figure 9. Single Channel Audio Attenuator with Loudness Compensation

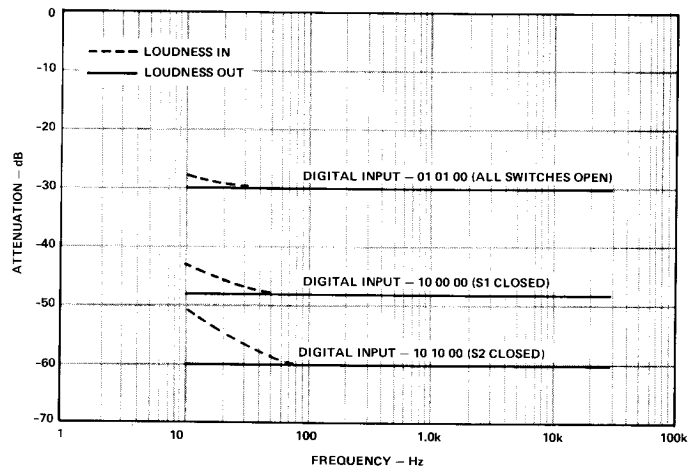


Figure 10.

Figure 10 shows the Attenuation vs. Frequency for the circuit of Figure 9. The attenuation is plotted against frequency for the two digital input codes at which the loudness compensation switches S1 and S2 are activated.